



SCAMAX® 8x1

The Power Tower



Replaces entire open track scanners

Our throughput heavyweight saves you space, time and money. For years to come.

With up to 300 sheets per minute and continuous 24/7 durability, the SCAMAX® 8x1 exceeds the throughput of some open track scanners — with its floor area of just one square meter. That saves space and time. But above all, it saves a lot of money. For its precise and high-grade construction lends this powerhouse not only its brilliant scanning quality along with its user-friendliness, but also a long life-cycle that results in its low overall operating costs for many years.

The SCAMAX® 8x1 is your smart and sustainable selection for the day-to-day scanning and sorting of document quantities in the five- to six-digit range. For many applications, it is the most cost efficient and space-saving alternative to an entire open track scanner. And: it is an InoTec production scanner, Made in Germany.

Arrange for a trial period today. We're looking forward to your call.

Performance Upgrade

More work on the desk? More power in the scanner!

SCAMAX® 821 | 300 sheets/min.

SCAMAX® 811 | 220 sheets/min.

SCAMAX®801 | 160 sheets/min,

All the scanners of the SCAMAX®
Series can be upgraded at any
time on site at your premises. Thus
you simply respond to increasing
scanning volumes with increasing
performance – while enjoying the
greatest possible investment security.
Another smart idea from InoTec for
even more economic and ecological
sustainability.

Scanner Performance

| Specification for Bitorial/Color 200/300 dpl | SCAMAX*801 | SCAMAX 811 | SCAMAX*821 |
|---|-----------------|-----------------|-----------------|
| SIMPLEX | 160 sheets/min. | 220 sheets/min. | 300 sheets/min. |
| A4 landscape | 160 pages/min. | 220 pages/min. | 300 pages/min. |
| DUPLEX | 160 sheets/min. | 220 sheets/min. | 300 sheets/min. |
| A4 landscape | 320 pages/min. | 440 pages/min. | 600 pages/min. |

The scanning speed is dependent on various factors such as paper size and texture, PC configuration and the scan application.

Speed is a number. Throughput is a fact.

No question about it: the fastest possible scanning speeds are a requirement for time-efficient scanning. Such speeds are significant however only when they are maintained reliably for many hours at a time or during complete shifts. Without stops. And without errors. Only then can high throughput be assured. And only then do we at InoTec name it 24/7 production scanners. Or in other words, if you want to make real headway, you need both speed *and* endurance.

CONTACT US

(024) 7625 4955 www.genusit.com info@genusit.com Hammond Close, Nuneaton, Warwickshire, CV11 6RY, United Kingdom





InoTec Organisationssysteme

At InoTec we optimize the business processes of our customers around the world with our highly trustworthy production scanners and excellent service. We have been doing this for more than 30 years. And we are still as keen on it as on the first day. Technical precision, long service life and sustainability as well as product and service quality Made in Germany are our commitment to our customers. And the demand we place on ourselves. We allow ourselves to be measured by this. With every single system.





Perfect Document TECHNOLOGY

Perfect Document Technology

for complete image processing on board: among other things, gamma correction, bicubic deskew, cropping and dynamic binarization for perfect bitonal images. In addition, Perfect Document Technology offers functions like multistreaming (simultaneous output of color, grayscale and bitonal images), automatic blank page detection, content based rotation, automatic color detection, patch-code controlled color changeover and much more.

Top Features

Double input system (optional)

with a capacity of 2,000 sheets (1,000 sheets per tray) for continuous paper input and uninterrupted scanning procedures. The intake is effected automatically from the stack or by single page feed. With integrated supports for long documents and asymmetrically adjustable paper guides.

Height adjustable

for ergonomic, effortless operation. The optimal working height can be easily adjusted to different operators at any time.

Traffic light logic

for fast, intuitive handling

Imprinter HD (optional)

for imprints of the highest quality at maximum scan speed. Print resolution: 300, 600 and 1,200 dpi. Printing height: 14.2 mm. Text size: adjustable up to 4 lines and barcode printing.

Large 9" MultiTouch Communication Panel (MTCP)

for maximum user friendliness and intuitive operation. With easily understandable pictograms, traffic light logic and clear full text messages.

Straight paper throughput with rear output tray

among other things, for the output of separated documents, e.g. dividers (with admission height up to 2 mm, optional in four steps up to 5 mm), by event control: e.g. by patch-code, counter, document length, barcodes (1D & 2D) etc.



Product videos

Scan the QR code to experience the product features in live operation.



VOL

and staples (with a three-year NoSCRATCH

warranty on glass guides).

High-speed stacker arm

reduction.

for controlled stacking of the

scanned documents without speed

Scanner Specifications

General Technical Specification

| Scanning Method | CCD line camera |
|---|--|
| Illumination | LED Illumination (diffuse) |
| Optical Resolution | 600 dpi |
| Output Resolutions | 75, 100, 150, 200, 240, 300, 400, 600 dpi dual or multi resolution possible |
| Output Compressions | CCITT Group IV, JPEG, PDF/R (Raster), TIFF or uncompressed |
| Color Image | 24 Bit, 16.8 million colors (True Color) |
| Gray Image | 8 Bit, 256 gray levels |
| Bitonal Image | 1 Bit color depth, bitonal |
| Daily Volume | Unlimited |
| Throughput ⁽⁵⁾ (by A4 landscape, 200 and 300 dpi, bitonal and color) | 160, 220 and 300 (upward models 801, 811 and 821) with upgrade option |
| Warranty | 12 month |
| NoSCRATCH-Warranty | 36 month on glass guide |

Image Processing / PDT (Perfect Document Technology)

| Image Orientation | Bicubic skewness correction with black border removal and text-oriented alignment |
|----------------------|---|
| Gamma Correction | 3-level correction (color, black, white) |
| Color Dropout | Up to three color areas definable |
| Binarization Method | Dynamic with pixel filters and result preview |
| Stream Control | Based on Automatic Color Detection and/or Event Control (e.g. Patch Code, 1D and 2D Barcode) |
| Blank Page Detection | Content-based dynamic procedure with two definable impact areas |
| ICC profiles | Embedding of ICC profiles or conversion to different target color spaces (e.g. sRGB, Adobe RGB1998, eciRGB) |

Paper Processing / Handling

| Working Height | Motor-driven from 640 mm to 1100 mm (shelf / input tray) | |
|-------------------|--|--|
| Paper Input | Automatically for batch or single sheet input, adjustable paper guide (also asymmetric), integrated support for long documents Dual Input Hopper for continuous processing (5) | |
| Max. Stack Height | 100 mm (approx. 1000 sheets at 80 g/m² paper), defined via profile | |
| Document Width | 56 mm to 317.5 mm | |
| Document Length | 60 mm to 6920 mm. (Nand (S)) Automatic LongDoc mode: extension of the maximus scan length to approx. 15.5 m by internal splitting of the image processing, depending on the selected resolution and chosen paper format. | |
| Paper Formats | ISO formats: A3, A4, A5, A6, A7, B4, B5, B6, B7 US formats: Ledger, Legal, Letter, Executive, Invoice User defined format | |
| Paper Weight (3) | 30 g/m² to 800 g/m² | |

(024) 7625 4955

www.genusit.com info@genusit.com Hammond Close, Nuneaton, Warwickshire, CV11 6RY, United Kingdom


| Max. Admission Height (2) | • 2,0 mm • With option "Straight Through Paper Path Elevation" in four steps up to 5 mm (4) Paper Flow Control (PFC) with optional length control | | |
|---------------------------|--|--|--|
| Flow Control | | | |
| Input Control | Mechanical paper separation, Paper Input Detection via five optical sensors and Double Feed Detection via three, separately definable, ultrasonic sensors | | |
| Scan Areas | Dust-protected with NoSCRATCH Glass Guide, variable height (three levels) with switchable scan background (black/white) | | |
| Document Output Front | Automatic tray up to 130 mm stack height with active air extraction, adjustable Paper Stop, asymmetrically adjustable Paper Guides, tray extension for long documents (max. 485 mm) and removal aid; HighSpeed Stacker Arm ⁽⁶⁾ for high speed scanning; 2nd Output Hopper ⁽⁵⁾ , controlled by active switch, for continuous processing | | |
| Document Output Rear | Rear output by straight paper path, controlled by active switch, to sort out separator sheets or to handle inflexible documents | | |
| Indexing | Sequential ID and four definable, event controlled counters for document indexing, integrated patch code and barcode reader 1D & 2D (e.g. 2/5 Interleaved, Code 39, Code 128, QR Code, Datamatrix) | | |
| Imprinter SD | Two integrated inkjet imprinter with ink management for definable print prior to scanning on document front side and/or after scanning on rear side | | |
| Imprinter HD [®] | HD imprinter (resolution 300, 600, 1200 dpi) with ink management for up to four lines printing prior scanning on document front side and/or after scanning on document rear side. Printing height up to 14.2 mm and barcode printing | | |
| Imprinter Digital | Digital image print. Content linkable to physical printed information and freely definable | | |

| Operation | Via capacitive 9" MultiTouch Communication Panel (MTCP) with integrated user management | |
|---------------|--|--|
| Supported OS | Windows 7/8 (32/64 Bit), Windows 10/11 (64 Bit) | |
| Driver | TWAIN™, ISIS® (MS61 ISIS compatible), WIA (on demand) | |
| Scan PC | USB 3.0 (socket type B) | |
| Interface | 3 x USB 2.1 (socket type A) for input devices/storage media. Socket DE-9 for service and up to 4 additional input switches | |
| Certification | TR-RESISCAN ready | |

Technical Data

| Power Consumption | Max. 800 ⁽⁵⁾ Watt, Standby Mode < 0,5 Watt | | |
|--------------------------|--|--|--|
| Electrical Connection | 100 - 240 Volt; 50/60 Hertz; max. 8 Ampere | | |
| Environmental Conditions | Temperature: 10 - 35 °C / 50 - 95 °F Relative humidity: 30 - 80% | | |
| Dimensions | Width: 1280 mm / 720 mm (without fittings) Depth: 1330 mm / 1150 mm (with/without Rear Output Tray) Height with one Output: min. 1070 mm / max. 1530 mm Height with 2. Output: min. 1390 mm / max. 1850 mm | | |
| Weight | From 190 kg to 240 kg ⁽⁵⁾ | | |
| Noise Emission | Operation ready (5): max. 45 dB (A) Operation (5): max. 74 dB (A) | | |

- $^{\scriptsize{\scriptsize{(1)}}}$ Restrictions in relation to image processing settings and resolution are possible
- (2) Maximum admission height is not equal to the maximum paper thickness. Dependent on the material
- (3) Maximum paper weight can vary and ultimately depend on surface condition and the flexibility of material
- $^{(4)}$ Corresponds to 10 sheets with Z-folded A4 (80g) in a standard envelope C4
- Depending on model
- (6) Optional

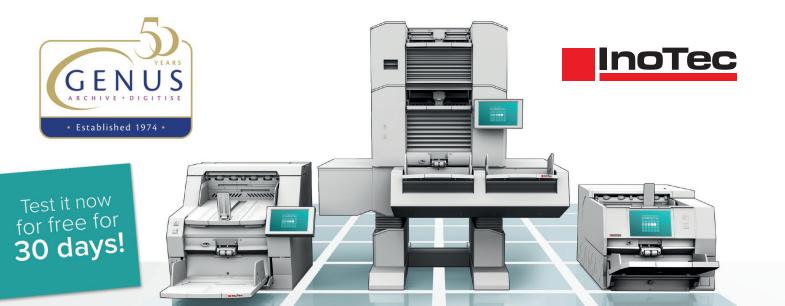

SCAMAX[®] scan+

■■■ The Performance Booster

High performance becomes maximum performance: this intuitively operated premium scan client fully utilizes the potential of your SCAMAX® production scanner.

InoTec production scanners rank among the most powerful on the ECM market. With SCAMAX®scan+ they reach their peak performance. This cost-effective premium scan client in familiar MS Office look-and-feel makes the entire scope of scanner functions available even at top scanning speed and it can be easily integrated in existing document and content management systems. For the most efficient and highest-quality scanning projects of all sizes.

SCAMAX®scan+ is the premium version of the SCAMAX®scan basic scan client included in the purchase price of every SCAMAX® scanner. Subject to a licensing fee, SCAMAX®scan+ includes numerous expanded functions and image processing options.

| Function | SCAMAX ®scan | SCAMA | XX ®scan+ | |
|--|----------------------|-------|---|---|
| Single scan / batch scan | 14 | • | Indexing via scanner information, barcode, OCR and manual | • |
| Dual stream / Multi stream | | • | Manual image processing (post scan) | ٠ |
| Second TWAIN source | | | Output format: TIFF, multipage TIFF, JPEG | ٠ |
| Max. pages displayed | 2 | 8 | Output format: PDF/A and others * | ٠ |
| Thumbnail view / tree view | | • | Output files: index, signal, TXT, XML, etc. | ٠ |
| Freely definable shortcuts | | ٠ | Customizing possible via PowerShell script | ٠ |
| Freely configurable project templates | up to 2 | 00 | Export process manager in the background (tasks of its own) | • |
| Use of scan counters | | ٠ | Output to conventional DMS / ECM systems | ٠ |
| Blank page detection via scanner info or p | oost scan | | Statistic module | • |
| Deletion marker for detected blank pages | or manual | • | Multilanguage | ٠ |
| 1D / 2D barcode recognition via 3 integra | ted engines ** | • | Docking windows | ٠ |
| Character recognition OCR (Open Source | e) | • | Easy import / export of project templates | • |
| Document separation via scanner (barcod | e / patch / counter) | * | Free updates ^(f) | • |
| Document separation, internal (barcode/0 | OCR/manual/etc.) | • | Digital license or hardware dongle (optional) | ٠ |

SYSTEM REQUIREMENTS

Intel Core 17, 8 GB working memory, Graphic card 1 GB memory, 2 GB free hard disk memory for the software environment, SSD hard disk as temporary scanning image memory

Operating systems supported: Windows 7 / 8.x / 10 / 11

- *= BMP, GIF, J2K, JP2, JPG, PDF/A, PNG, PNM, PSD, TGA, TIF, WMF
- ** = Codabar, Code 128, Code 32, Code 39, Code 93, Data Matrix, EAN 13, EAN 8, Interleaved 2/5, Patchcode, PDF417, Postnet, Plus 2, Plus 5, QR Code, UPC A, UPC E
- (1) within a major version

(024) 7625 4955

www.genusit.com

info@genusit.com


Hammond Close, Nuneaton, Warwickshire, CV11 6RY, United Kingdom





Clearly arranged for intuitive operation

The multilingual program surface in office design offers easily understandable symbols and a freely definable quick function toolbar.

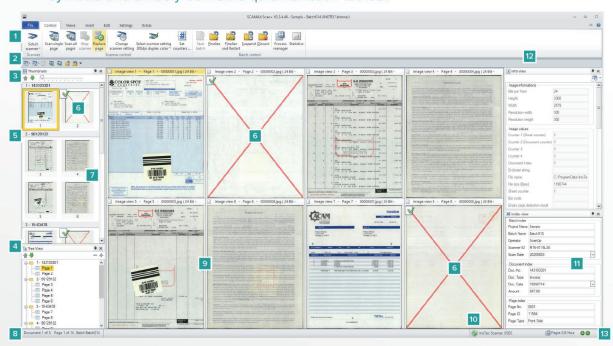

- Function toolbar with easily understandable symbols
- Freely definable quick function toolbar
- Thumbnail view
- Tree view
- Document separation
- Blank page detection with deletion marker

- Page counter
- Document and page counter display
- View of the scanned images
- Scanner status
- Index window
- 12 Info window
- Display of the scanning performance



Would you like to test SCAMAX®scan+free of charge?

Just scan the QR code and try out the full version free and without obligation for 30 days.

- High performance scan client for digitizing and capturing documents
- Superb price/performance ratio free updates
- Ideal for SME, scanning service providers, banks, insurance companies and public authorities



Biedrichstraße 11 61200 Wölfersheim Germany

P +49 6036 9708 0 info@inotec.eu

www.inotec.eu

(024) 7625 4955

www.genusit.com

info@genusit.com

Hammond Close, Nuneaton, Warwickshire, CV11 6RY, United Kingdom